


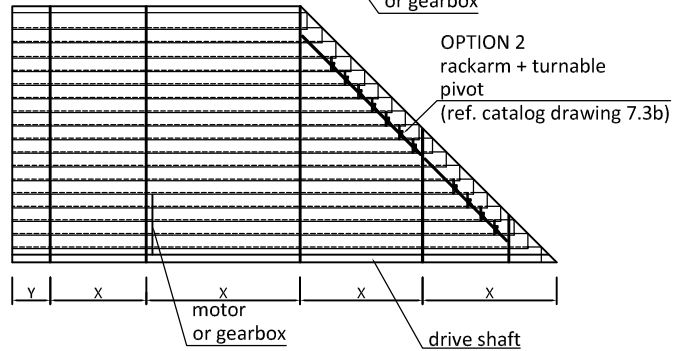
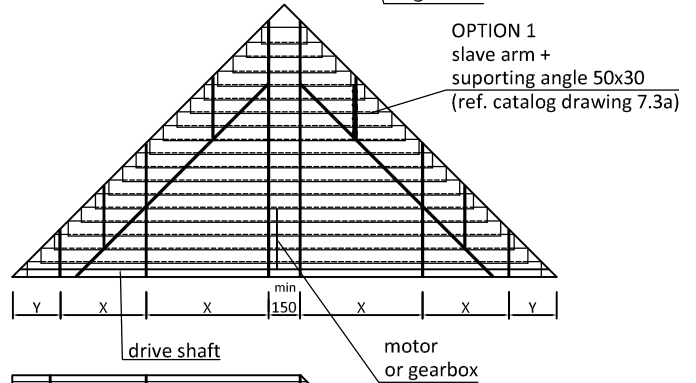


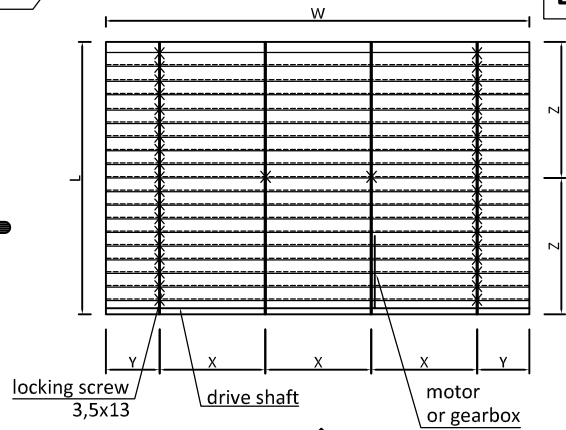

INTERNAL / EXTERNAL BLINDS

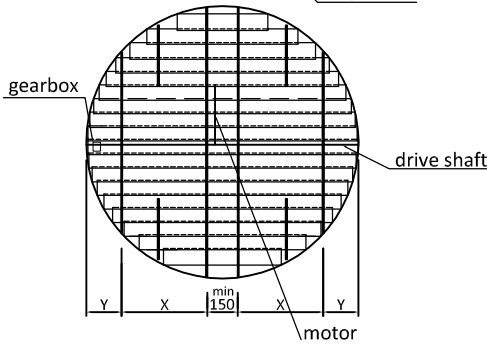

88mm extruded louvers

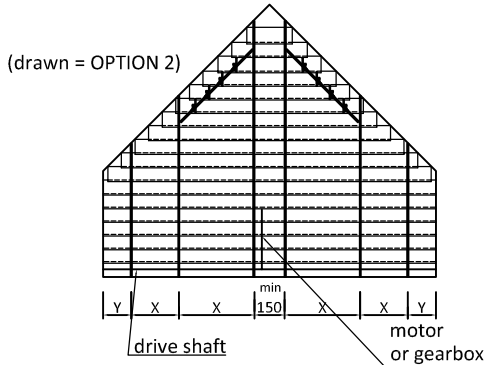

available colors:

nat. anodized
standard RAL colors

Sunshield 88 E extruded louvers



INTERNAL

EXTERNAL

max. width	W	max. 600 cm	max. 600 cm	
max. length / drop / height	L	max. 450 cm	max. 400 cm	
max. area gearbox (rod & crank)		max. 16 m ²	max. 12 m ²	
50220 230V tubular+gear 7:1		max. 18 m ²	max. 18 m ²	
50263 230V compact motor		max. 6 m ²	not applicable	
50265 230V compact motor		max. 12 m ²	not applicable	
motor Elero / Picolo with driveshaft 35mm		max. 30 m ²	max. 30 m ²	
number of rack arms		minimum # rack arms	minimum # rack arms	standard # rack arms
		220 cm = 2 pcs	190 cm = 2 pcs	130 cm = 2 pcs
		221-360 cm = 3 pcs	191-320 cm = 3 pcs	131-260 cm = 3 pcs
		361-500 cm = 4 pcs	321-450 cm = 4 pcs	261-390 cm = 4 pcs
		501-600 cm = 5 pcs	451-580 cm = 5 pcs	391-520 cm = 5 pcs
			581-600 cm = 6 pcs	521-600 cm = 6 pcs
rack arm distance	X	140 cm	130 cm	
slat side overhang	Y	40 cm	30 cm	
support distance	Z			
st. rack arm 35 mm		180 cm	120 cm	
heavy duty rack arm 80 mm		300 cm	240 cm	
box rack arm 100 mm		420 cm	350 cm	

