

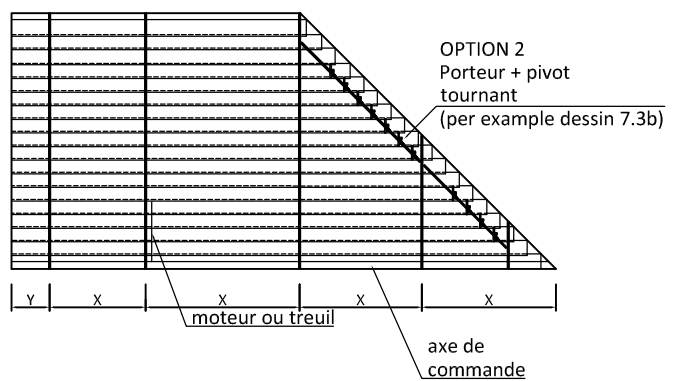
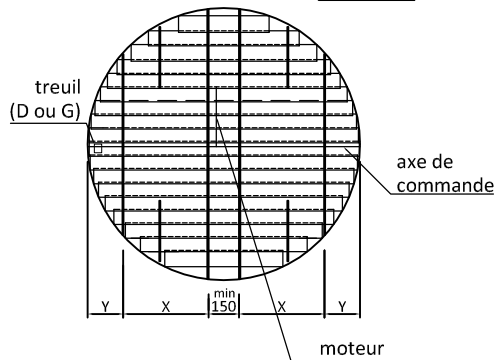
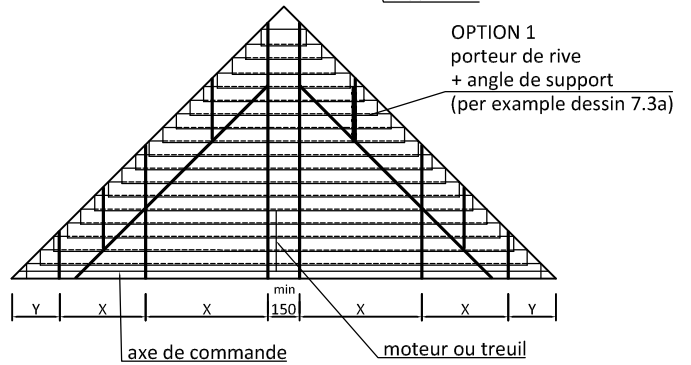


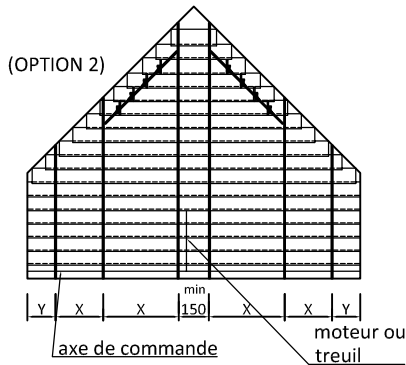

# INTERNAL / EXTERNAL BLINDS

80mm rollform slat

DATA 80R

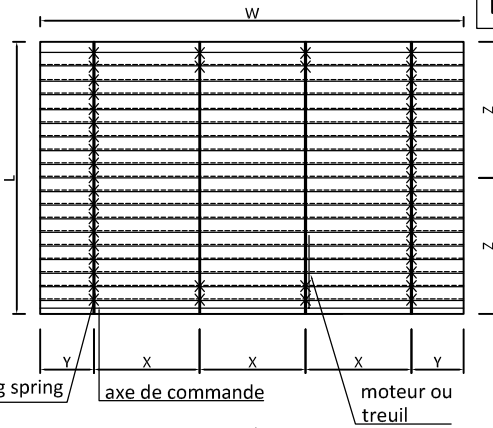


available colors:

standard :  
 RAL 9002 white      RAL 9006 silver  
 RAL 9010 white      RAL 7016 grey / dark  
 RAL 9016 white      RAL 7035 grey / light  
 RAL 9005 black  
 all other colors at request  
 (min. 75m<sup>2</sup> projects)

## Sunshield 80mm aluminium slat

		INTERNAL	EXTERNAL
max. width	W	max. 500 cm	max. 500 cm
max. length / drop / height	L	max. 600 cm	max. 600 cm
max. area			
gearbox (rod & cranck)		max. 20 m <sup>2</sup>	max. 16 m <sup>2</sup>
50220 230V tubular+gear 7:1		max. 20 m <sup>2</sup>	max. 18 m <sup>2</sup>
50263 230V compact motor		max. 10 m <sup>2</sup>	---
50265 230V compact motor		max. 20 m <sup>2</sup>	---
230V motor Elero / piccolo with driveshaft 35mm		max. 30 m <sup>2</sup>	max. 30 m <sup>2</sup>
number of rack arms	R	minimum # rack arms	standard # rack arms
		220 cm = 2 pcs	150 cm = 2 pcs
		221-360 cm = 3 pcs	90 cm = 2 pcs
		361-500 cm = 4 pcs	151-240 cm = 3 pcs
			241-330 cm = 4 pcs
			331-430 cm = 5 pcs
			271-360 cm = 5 pcs
			361-450 cm = 6 pcs
rack arm distance	X	140 cm	90 cm
slat side overhang	Y	40 cm	30 cm
	Z		
support distance			
standard rack arm 35 mm		225 cm	150 cm
heavy duty rack arm 80 mm		350 cm	280 cm
box rack arm 100 mm		500 cm	380 cm

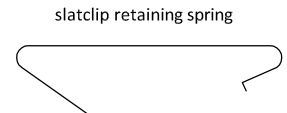

D80R.100.01